4332620000171

选型举例：ordering information

LK20- □ - □□ - □□

- d2轴径：d2Bore
- d1轴径：d1Bore
- 外径尺寸：Outside Diam

Example：LK20-20-5-3

LK20——系列号，材料为铝合金

20——外径尺寸：20mm，定位螺丝固定

5——d1：5mm

3——d2：3mm

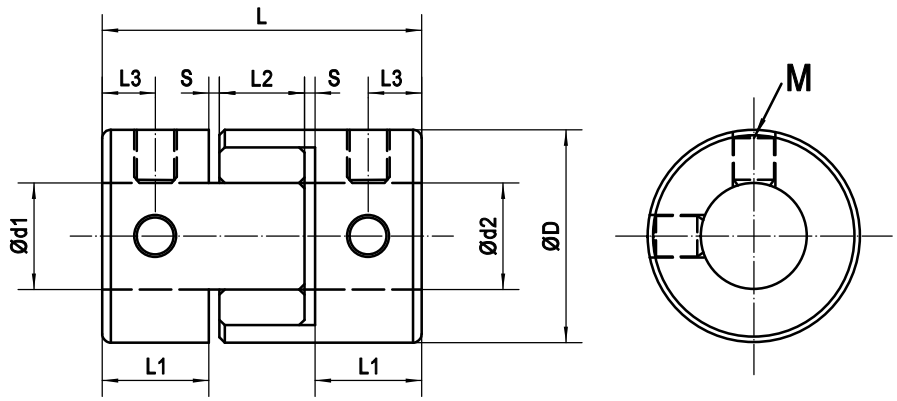

型号：LK20-20-5-4

Specifications

Model	额定扭矩 Rated Torque (N.m)	最大扭矩 Max.Troque (N.m)	最高转速 Max.Speed (rpm)	惯性力矩 Moment of Inertia (gcm2)	静态扭矩刚性 Static Torsional Stiffness (N.M/rad)	容许径向偏差 Errors of Eccentricity (mm)	容许角向偏差 Errors of Angularity (°)	容许轴向偏差 Error of Shaft End-play (mm)	重量 Mass (g)
LK20-20	2.8	5.6	17000	9.3	55	0.02	1.0	0.6/0	20.5

Dimensions

unit:mm

型号Model	Φd1 Φd2 最大孔径 Max.Bore	Φd	L	L1	L2	S	L3	M	拧紧力矩 Wrench Torque (N.M)
LK20-20-□□□□	10	20	30	10	8	1	5	M4	2.5

REV.	版本记录 REVISION RECORD	DATE
	原始版本 Original revision	

Unit: mm
第一角画法 FIRST ANGLE METHOD
未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1：m
未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2：K

UNLESS OTHERWISE SPECIFIED

	NAMES	SIGNATURE	DATE
批准 Approve			
标准化 Standard			
工艺 Technology			
审核 Check			
设计 Design	段伟		2020.05.20

MOONS' COUPLING 联轴器

Shanghai Moons' Electric Co., Ltd.

This ducument is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

LK20-20-5-4	REV.A	SCALE 1:1	Sheet 1 of 1